



DCD IDEAL

SCHWENK Dämmtechnik

telefon

fax

Dynín
Slavětín

387 789 016
585 345 225




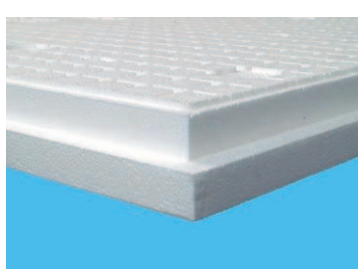

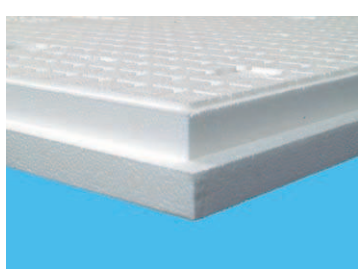
387 789 026
585 345 213



PERIMETER

Ceník platný od 1. 10. 2009

1265 x 615 mm (1250 x 600 mm zabudovaný rozměr)

PERIMETER DUO 3 200,00 Kč / m ³		tloušťka (mm)	ks / balík	m ² / balík	ceny bez DPH		s DPH		
					Kč / ks	Kč / m ²	Kč / m ²		
		40	10	7,50	96,00	128,00	152,32		
		50	8	6,00	120,00	160,00	190,40		
		60	7	5,25	144,00	192,00	228,48		
		70	6	4,50	168,00	224,00	266,56		
		80	5	3,75	192,00	256,00	304,64		
		100	4	3,00	240,00	320,00	380,80		
		120	3	2,25	288,00	384,00	456,96		
		140	3	2,25	336,00	448,00	533,12		
		160	2	1,50	384,00	512,00	609,28		
		180	2	1,50	432,00	576,00	685,44		
		200	2	1,50	480,00	640,00	761,60		
Součinitel tepelné vodivosti λ : Napětí při 10% deformaci: Izolace spodní stavby:	0,035 W/mK 200 kPa do 3 m	60	7	5,25	135,00	180,00	214,20		
PERIMETER UNO 3 000,00 Kč / m ³		80	5	3,75	180,00	240,00	285,60		
		100	4	3,00	225,00	300,00	357,00		
		120	3	2,25	270,00	360,00	428,40		
		140	3	2,25	315,00	420,00	499,80		
		160	2	1,50	360,00	480,00	571,20		
		180	2	1,50	405,00	540,00	642,60		
		200	2	1,50	450,00	600,00	714,00		
		220	2	1,50	495,00	660,00	785,40		
		240	2	1,50	540,00	720,00	856,80		
		260	2	1,50	585,00	780,00	928,20		
		280	2	1,50	630,00	840,00	999,60		
		300	2	1,50	675,00	900,00	1071,00		
Součinitel tepelné vodivosti λ : Napětí při 10% deformaci: Izolace spodní stavby:	0,035 W/mK 200 kPa do 4,5 m	PERIMETER BIANCO 2 800,00 Kč / m ³		40	10	7,50	84,00	112,00	133,28
		60	7	5,25	126,00	168,00	199,92		
		80	5	3,75	168,00	224,00	266,56		
		100	4	3,00	210,00	280,00	333,20		
		120	3	2,25	252,00	336,00	399,84		
		140	3	2,25	294,00	392,00	466,48		
		160	2	1,50	336,00	448,00	533,12		
		180	2	1,50	378,00	504,00	599,76		
		200	2	1,50	420,00	560,00	666,40		
Součinitel tepelné vodivosti λ : Napětí při 10% deformaci: Izolace spodní stavby:	0,035 W/mK 150 kPa do 3 m								